




Simulation of multiclass retrial system with coupled orbits

Evsey Morozov^{1,2} , Taisia Morozova² , and Ioannis Dimitriou³ 

¹ Institute of Applied Mathematical Research, Karelian Research Centre of the RAS,
Petrozavodsk, Russia

² Petrozavodsk State University, Petrozavodsk, Russia, tiamorozova@mail.ru

³ University of Patras, Greece

Abstract. In this work, we verify by simulation some recent theoretical results describing the dynamics of the the retrial system with *coupled orbits*. In such a system, retransmission rate of customers blocked in a virtual orbit depends in general on the binary state, busy or idle, of other orbits. We consider a system with N classes of customers, where an arriving customer which meets server busy, joins the corresponding orbit depending on the class of customer. The top (oldest) blocked customer makes an attempt to enter server, with class-dependent exponential time between attempts. At that the retrial rate is defined by the current states (busy or idle) of other orbits. To verify theoretical results, we simulate single-server retrial system with 3 classes of customers following independent Poisson inputs, while service times are class-dependent and have general distributions. In particular, we verify necessary and sufficient stability conditions and focus on the analysis of symmetric model. Numerical experiments confirm theoretical analysis.

Keywords: Multiclass retrial queues · Stability · Constant retrial rates · Coupled orbit queues · Cognitive network.

1 Introduction

This research is devoted to verification by simulation a few performance results obtained in previous work [17,16]. Moreover, we focus on verification of the obtained stability conditions of the system with coupled orbits. In general, sufficient and necessary stability conditions are different, and the study of the "gap" between these conditions is important in practice. Indeed, as we show, sufficient condition is redundant, and possible extension of stability region seems to be useful to increase the efficiency (throughput) of the system. In this work we pay the main attention to the so-called symmetric model, in which all classes of customers have the same parameters. This scenario allows to simplify analysis and detect some properties which turn out to be useful in a more general setting. In simulation, we focus on the symmetric system with three classes of customers which follow independent Poisson inputs. It is worth mentioning that this research complements and develops previous works [17,16].

To study classical retrial queues, we mention the books [12,1], and the survey papers [2,13]. Also the stability analysis of a multi-class retrial queue with *constant retrial rates*, which do not depend on the states of other orbits, has been developed in [4,5].

As to application of the system with coupled orbits, we mention the modelling of wireless multiple access systems, in particular, relay-assisted cognitive cooperative wireless systems [18]. Moreover, in the modern cognitive radio [15] there exists a possibility to dynamically adjust retransmission rates to improve spectrum utilization [6,8,11]. Furthermore, as it has been mentioned in [16], this model is suitable to describe dynamics of cellular networks, in which the transmission rate in a particular cell decreases as the number of users in the neighboring cells increase [6]. A similar effect is observed in the processor sharing models [7,14].

This paper is organized as follows. In Section 2 we describe the basic model. In Section 3 we summarize the main theoretical results obtained in [17] which we verify by simulation in Section 4. In particular, we introduce the symmetric model with coupled orbits. In section 4 we verify theoretical results simulating 3-class symmetric model with exponential and Pareto service times. In particular, we estimate the stationary probability that a fixed orbit is busy and server is idle, and demonstrate the correctness of the lower and upper bounds of this probability. Also the accuracy of stability conditions is studied, using the "gap" between the necessary and sufficient stability conditions. Actually simulation shows that the necessary stability condition is in fact stability criterion of the system.

2 Description of the model

We study a single-server with no buffer for the waiting customers, and with three classes of customers. Nevertheless, it is worth mentioning that the theoretical results, which we will verify, hold for an arbitrary number N of customer classes. By this reason we will formulate below theoretical results for this general setting.

The class- i customers form Poisson input with rate λ_i , $i = 1, \dots, N$. Because all inputs are assumed to be independent, then the summary input is Poisson as well, with rate $\lambda := \sum_i \lambda_i$, in which an arbitrary arrival belongs to class i with the probability $p_i := \lambda_i/\lambda$, $i = 1, \dots, N$. Then interarrival times of the input are exponential with generic element τ and expectation $\mathbb{E}\tau = 1/\lambda \in (0, \infty)$. We also assume service times of class- i customers, $\{S_n^{(i)}, n \geq 1\}$, to be independent identically distributed (iid) with service rate

$$\gamma_i =: \frac{1}{\mathbb{E}S^{(i)}} \in (0, \infty), i = 1, \dots, N.$$

A customer, meeting server busy joins a class-dependent virtual orbit, where joins the end of the orbit queue. At that the head customer waiting in orbit i makes retrial attempts until he finds server idle to occupy it. The distance between attempts are exponentially distributed with rate $\mu_{J(i)}$, where $J(i)$ is the

current *configuration of the orbits: busy or empty*. Thus each orbit acts as a FIFO queueing system with state-dependent "service" rate $\mu_{J(i)}$. This dependence is a key new property of the model.

To be more precise, for each i , we define $(N - 1)$ -dimensional vectors

$$J(i) = \{j_1, \dots, j_{i-1}, j_{i+1}, \dots, j_N\}$$

with binary components $j_k \in \{0, 1\}$, where the i th component is omitted. If the k -th orbit is currently busy, we put $j_k = 1$, otherwise, $j_k = 0$. Each vector $J(i)$ is called *configuration*. For each i , we introduce the set $\mathcal{G}(i) = \{J(i)\}$ of possible configurations. It is assumed that there is given constant $\mu_{J(i)}$, retransmission rate from orbit i , if current configuration is $J(i)$. We denote M_i the set of rates for all configurations belonging to $\mathcal{G}(i)$.

This construction, proposed in [17], considerably generalizes the setting studied in previous works [16,11,10,9]. In these works, it is assumed that orbit i has rate μ_i if at least one (other) orbit is busy, otherwise, the rate is μ_i^* , $i = 1, \dots, N$. Thus, in setting in [16], each set $M_i = \{\mu_i^*, \mu_i\}$. In this work we continue to study th new general setting from [17] with focus on verification some bounds and stability conditions proved in [17], for the system with three classes of customers.

Before to give main stationary performance measures to be verified by simulation, we mention that the main stochastic processes describing the dynamics of the system, such like accumulated work (workload) orbit size, ect., are *regenerative*, with regeneration instants T_n . A regeneration occurs when a new customer meets an idle system [3]. The distances $T_{n+1} - T_n$ are iid *regeneration periods*, and we denote T the generic period.

A queuing process is called *positive recurrent* if the mean generic period is finite, that is $ET < \infty$ [3]. Under positive recurrence, there exists the stationary regime of the system [3].

3 Preliminary results

Now we define the main stationary performance metrics and give necessary and sufficient stability conditions proved in [17] by regenerative method. Let $I(t)$ be the summary idle time of the server in interval $[0, t]$, then busy time is defined as $B(t) = t - I(t)$.

If the system is positive recurrent, then there exist the limits, with probability (w.p.) 1,

$$\lim_{t \rightarrow \infty} \frac{I(t)}{t} = P_0 = 1 - P_b,$$

where P_0 is the stationary idle probability of the server, and

$$P_b = \lim_{t \rightarrow \infty} \frac{B(t)}{t}$$

is the stationary busy probability of the server. Denote $B_i(t)$ the summary time, in interval $[0, t]$, when the server is occupied by class- i customers. It is proved

in [17] that the stationary probability that the server is occupied by class- i customer is defined as

$$\lim_{t \rightarrow \infty} \frac{B_i(t)}{t} = P_b^{(i)} = \rho_i, \quad i = 1, \dots, N.$$

Denote the traffic intensity for each class,

$$\rho_i = \lambda_i / \gamma_i, \quad i = 1, \dots, N,$$

and summary traffic intensity

$$\rho = \sum \rho_i.$$

Because $P_b = \sum_i P_b^{(i)}$ then it follows that $P_b = \rho$.

Now we introduce the maximal possible rate from orbit i :

$$\hat{\mu}_i = \max_{J(i) \in \mathcal{G}(i)} \mu_{J(i)}.$$

The following statement, which has been proved in [17], contains the necessary stability (positive recurrence) condition of our system.

Theorem 1. If the N -class retrial system with coupled orbits is positive recurrent, then

$$P_b = \sum_{i=1}^N \rho_i = \rho \leq \min_{1 \leq i \leq N} \left[\frac{\hat{\mu}_i}{\lambda_i + \hat{\mu}_i} \right] < 1. \quad (1)$$

To formulate the next statement and sufficient stability conditions, we denote, for each class i , the minimal retrial rate

$$\mu_i^0 = \min_{J(i) \in \mathcal{G}(i)} \mu_{J(i)}.$$

Also let $P_0^{(i)}$ be the stationary probability that server is idle and orbit i is busy. The following statement is proved in [17].

Theorem 2. The following inequalities hold

$$\frac{\lambda_i}{\hat{\mu}_i} \rho \leq P_0^{(i)} \leq \frac{\lambda_i}{\mu_i^0} \rho, \quad i = 1, \dots, N. \quad (2)$$

Now we formulate the sufficient stability condition [17].

Theorem 3. The sufficient stability condition of N -class retrial system with coupled orbits is

$$\sum_{i=1}^N \rho_i + \max_{1 \leq i \leq N} \frac{\lambda}{\mu_i^0 + \lambda} < 1.$$

This condition implies a negative drift of the workload process, and as a result, positive recurrence of the system, and can be written as

$$\rho = \sum_i \rho_i < \min_i \left(\frac{\mu_i^0}{\lambda + \mu_i^0} \right). \quad (3)$$

To compare (3) with the necessary stability condition (1), we define the *gap* between the necessary and sufficient conditions,

$$\Delta := \min_i \frac{\hat{\mu}_i}{\lambda_i + \hat{\mu}_i} - \min_i \frac{\mu_i^0}{\lambda + \mu_i^0} > 0. \quad (4)$$

An important special class constitute the *symmetric systems*. To explain symmetry for the system with coupled orbits, we first note that this system becomes standard retrial system with constant rate provided $\mu_{J(i)} \equiv \mu_i$, implying equality $\hat{\mu}_i = \mu_i^0 = \mu_i$. The latter standard retrial system with constant rate, becomes symmetrical, if the corresponding parameters are equal, that is

$$\lambda_i \equiv \lambda, \gamma_i \equiv \gamma, \mu_i \equiv \mu.$$

However, the notion symmetrical system with coupled orbits is more flexible. To explain it in more detail, we define, for each i , the set of vectors describing retrial rates for each configuration $J(i) = \{j_1, \dots, j_N\}$. Because in our case $N = 3$, then the capacity $|J(i)| = 4$ for each $i = 1, 2, 3$. To compose $J(i)$, we use lexicographical order, that is, for each orbit i , and two remaining orbits $j < k$, with $k, j \neq i$, the following four configurations $J(i)$ are possible:

$$\mathcal{M}_i =: \{(i_j = 0, i_k = 0), (i_j = 1, i_k = 0), (i_j = 0, i_k = 1), (i_j = 1, i_k = 1)\}. \quad (5)$$

(Recall that $i_k = 1$ means that orbit k is busy, while $i_k = 0$ means that it is empty.) We denote $\mu_{00}^i, \mu_{10}^i, \mu_{01}^i, \mu_{11}^i$, the retrial rates corresponding to each configuration in (5). Then we obtain that, in the symmetrical system, all sets

$$\mathcal{G}(i) = \{\mu_{00}^i, \mu_{10}^i, \mu_{01}^i, \mu_{11}^i\}, \quad i = 1, 2, 3,$$

are identical, although rates within $\mathcal{G}(i)$ may *differ*. One can expect that this structure leads to similar behavior of the orbits, and it is confirmed below by simulation.

Note that for the symmetric coupled orbits, the difference (4) becomes

$$\Delta := \frac{\hat{\mu}}{\lambda/N + \hat{\mu}} - \frac{\mu^0}{\lambda + \mu^0},$$

where $\hat{\mu} = \hat{\mu}_i$, $\mu^0 = \mu_i^0$. Finally, for symmetric classical (*non-coupled*) orbits, $\hat{\mu} = \mu^0$ and (4) becomes

$$\Delta = \frac{\mu}{\lambda/N + \mu} - \frac{\mu}{\lambda + \mu}.$$

In the next section, containing simulation results, we analyze the symmetric model and leave studying a more general model for a further work.

Remark. For non-coupled orbits, $\mu_{J(i)} = \mu_i$ for all configurations $J(i)$, and each busy orbit i has a fixed retrial rate μ_i . Then relation (2) becomes

$$\lambda_i P_b = \mu_i P_0^{(i)},$$

and we obtain the following explicit formula for the stationary probability that orbit queue i is busy and server is idle, see [17]:

$$P_0^{(i)} = \frac{\lambda_i}{\mu_i} \sum_{k=1}^N \rho_k, \quad i = 1, \dots, N.$$

4 Simulation results

In this section we verify by simulation some obtained above theoretical results for three classes of customers considering symmetric model. To this end, we define the following variables,

$$\Gamma_1 := \min_i \frac{\hat{\mu}_i}{\lambda_i + \hat{\mu}_i} - \rho, \quad \Gamma_2 := \min_i \frac{\mu_i^0}{\lambda + \mu_i^0} - \rho.$$

which delimit the boundary of stability region. More exactly, if $\Gamma_i > 0$, $i = 1, 2$, then both stability conditions (1) and (3) are satisfied. If $\Gamma_i < 0$, $i = 1, 2$, then instability of the orbits is expected. However, if the intermediate case $\Gamma_1 > 0$, $\Gamma_2 < 0$ holds, then, as simulation shows, the orbits are stable in all experiments. It indicates that the necessary stability condition is in fact stability criterion, while sufficient stability condition is redundant. (However we can not prove it strictly for the system with general service times.) These observations are illustrated by simulation below. We emphasize again that in this work we pay attention simulation symmetric model with coupled orbits.

Now we present numerical results obtained by simulation, to verify theoretical analysis of stationary regime and necessary and sufficient conditions (1), (3). Everywhere we use the black, grey and dotted curve to demonstrate the dynamics of the 1st, 2nd and 3rd orbit, respectively. (The axis t counts the number of discrete events: arrivals, departures, attempts, in the applied discrete-event simulation algorithm.)

First we perform some experiments for the completely symmetric model and demonstrate stability/instability of all orbits. This analysis also shows the redundancy of sufficient condition (3) for stability because simulation stays all orbits stable even for $\Gamma_1 < 0$.

In the 1st experiment, we use the following input and service rates,

$$\lambda_1 = \lambda_2 = \lambda_3 = 3, \gamma_1 = \gamma_2 = \gamma_3 = 15,$$

and the following retrial rates:

$$\begin{aligned} M_1 &= \{\mu_{00}^1 = 20, \mu_{10}^1 = 30, \mu_{01}^1 = 15, \mu_{11}^1 = 25\}, \\ M_2 &= \{\mu_{00}^2 = 20, \mu_{10}^2 = 30, \mu_{01}^2 = 15, \mu_{11}^2 = 25\}, \\ M_3 &= \{\mu_{00}^3 = 20, \mu_{10}^3 = 30, \mu_{01}^3 = 15, \mu_{11}^3 = 25\}. \end{aligned} \quad (6)$$

Thus, with those parameters we receive $\rho = 0.6$ and $\Gamma_1 = 0.3$, $\Gamma_2 = 0$. Therefore, both stability conditions are satisfied and all orbits are stable, as expected, and we can see that at Fig. 1

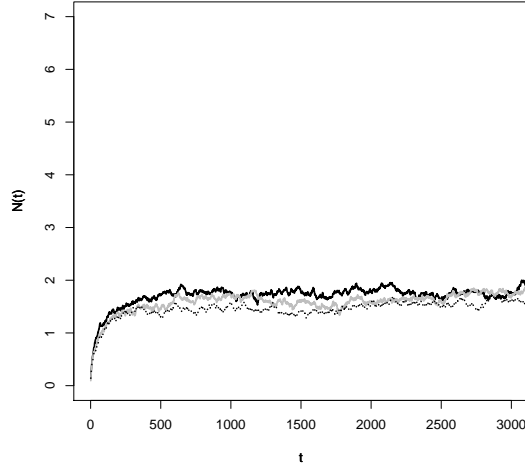


Fig. 1. The symmetric system, exponential service time. Condition (1) and (3) hold: $\Gamma_1 > 0$, $\Gamma_2 > 0$; all orbits are stable.

In the following experiments we show the results for Pareto service times (*Pareto model*), and *not equal service rates, ceteris paribus*. That is we still keep a symmetry in the input rates.

Fig. 4 shows the dynamics of the orbits in Pareto model with service time distribution

$$F_i(x) = 1 - \left(\frac{x_0^i}{x}\right)^\alpha, \quad x \geq x_0^i \quad (F_i(x) = 0, \quad x \leq x_0^i),$$

and expectation

$$ES^{(i)} = \frac{\alpha x_0^i}{\alpha - 1}, \quad \alpha > 1, \quad x_0^i > 0, \quad i = 1, 2, 3.$$

We select $\alpha = 2$ and the following values of the shape parameter x_0^i for orbit $i = 1, 2, 3$, respectively:

$$x_0^i = \frac{1}{24}, \quad i = 1, 2, 3.$$

This choice gives the following service rates

$$\gamma_1 = \gamma_2 = \gamma_3 = 12,$$

ceteris paribus. Here $\rho = 0.76$, implying $\Gamma_1 = 0.14$ and $\Gamma_2 = -0.16$. Thus condition (1) holds while condition (3) is violated. As we see, all three orbits remain stable, however the stability is reached at a higher level.

In the 3rd experiment, shown on the Fig.3, we further increase service rate

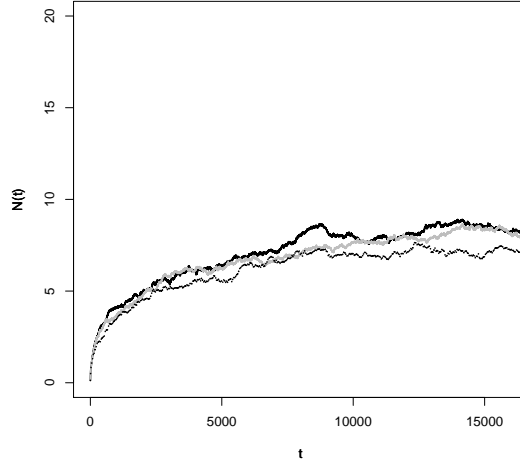


Fig. 2. The symmetric system, Pareto service time. Condition (1) holds, condition (3) is violated: $\Gamma_1 > 0$, $\Gamma_2 < 0$; all orbits are stable at a higher level.

(*ceteris paribus*)

$$\gamma_1 = \gamma_2 = \gamma_3 = 10.$$

Here we obtain $\rho = 0.9$ and it gives $\Gamma_1 = 0$, $\Gamma_2 = -0.3$. Thus both conditions (1) and (3) are violated. ($\Gamma_1 = 0$ is called *boundary case*.) As we see on Fig. 3, all orbits become now unstable.

Thus in these experiments, a gradual decreasing service rates (which implies reduction Γ_1 and Γ_2) makes orbits unstable only if the necessary condition (1) is violated. So we suggest that condition (3) is redundant, and moreover that the necessary condition (1) is indeed stability criterion.

In the following experiment we demonstrate the estimation of the stationary probability $P_0^{(1)}$ for the symmetric model with *exponential service time*. In that experiment we use the following input and service rates,

$$\lambda_1 = \lambda_2 = \lambda_3 = 3\gamma_1 = \gamma_2 = \gamma_3 = 15,$$

while the retrial rates remain (6). Thus in this case μ_i^0 and $\hat{\mu}_i$ are different, and exact value of the target probability is unknown. However, by the positive recurrence, the sample mean estimate still converges to a limit. Fig. 4 shows that the sample mean estimator of $P_0^{(1)}$ satisfies the corresponding inequality in (2). (The dynamics of the estimators of $P_0^{(2)}$ and $P_0^{(3)}$ is similar and is omitted.)

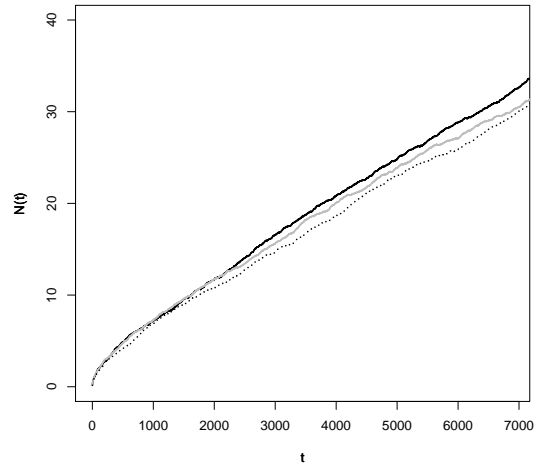


Fig. 3. The symmetric system, Pareto service time. Conditions (1) and (3) are violated: $\Gamma_1 < 0$, $\Gamma_2 < 0$; all orbits are unstable.

5 Conclusion

In this work, we simulate a 3-class symmetric retrial system with independent Poisson inputs and the coupled orbits to verify some theoretical results found earlier. In this system, a new customer meeting server busy joins the corresponding infinite capacity orbit. The retrial rate from orbit i depends on the current configuration of other orbits: busy or idle. We verify by simulation some stationary performance measures and the accuracy of the found earlier stability conditions of this model.

ACKNOWLEDGEMENTS

The study was carried out under state order to the Karelian Research Centre of the Russian Academy of Sciences (Institute of Applied Mathematical Research KRC RAS). The research of EM is partly supported by Russian Foundation for Basic Research, projects 18-07-00147, 18-07-00156. The research of TM is supported by Petrozavodsk State University and Russian Foundation for Basic Research, project 18-07-00147.

References

1. Artalejo, J.R., Gómez-Corral, A.: Retrial Queueing Systems: A Computational Approach. Springer-Verlag Berlin Heidelberg (2008), <https://doi.org/10.1007/978-3-540-78725-9>

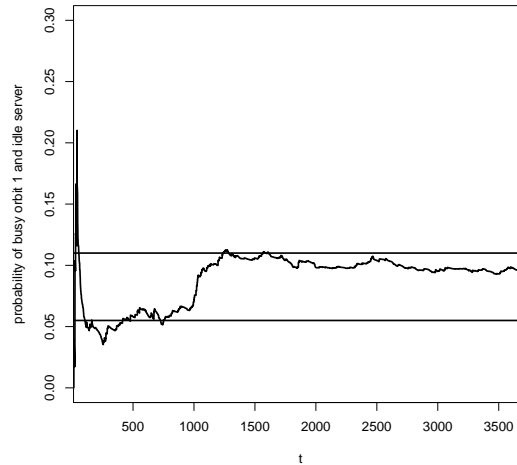


Fig. 4. The symmetric system, Pareto service time. Estimation the probability $P_0^{(1)} = P(\text{busy orbit 1, idle server})$.

2. Artalejo, J.: Accessible bibliography on retrial queues: Progress in 2000-2009. *Mathematical and Computer Modelling* pp. 9–10 (2010)
3. Asmussen, S.: *Applied probability and queues*. Springer, New York (2003)
4. Avrachenkov, K., Morozov, E., Nekrasova, R., Steyaert, B.: Stability analysis and simulation of N-class retrial system with constant retrial rates and poisson inputs. *Asia-Pacific Journal of Operational Research* **31**(2) (2014). <https://doi.org/10.1142/S0217595914400028>
5. Avrachenkov, K., Morozov, E., Steyaert, B.: Sufficient stability conditions for multi-class constant retrial rate systems. *Queueing Systems* **82**(1-2), 149–171 (Feb 2016). <https://doi.org/10.1007/s11134-015-9463-9>, <http://link.springer.com/10.1007/s11134-015-9463-9>
6. Bonald, T., Borst, S., Hegde, N., Proutiere, A.: Wireless data performance in multi-cell scenarios. *Proc. ACM Sigmetrics/Performance '04* pp. 378–388 (2004)
7. Bonald, T., Massoulié, L., Proutière, A., Virtamo, J.: A queueing analysis of max-min fairness, proportional fairness and balanced fairness. *Queueing Syst.* (2006)
8. Borst, S., Jonckheere, M., Leskela, L.: Stability of parallel queueing systems with coupled service rates. *Discrete Event Dyn. S.* pp. 447–472 (2008)
9. Dimitriou, I.: *Modeling and analysis of a relay-assisted cooperative cognitive network*. Springer (2017)
10. Dimitriou, I.: A queueing system for modeling cooperative wireless networks with coupled relay nodes and synchronized packet arrivals. *Perform. Eval.* (2017). <https://doi.org/10.1016/j.peva.2017.04.002>
11. Dimitriou, I.: A two class retrial system with coupled orbit queues. *Prob. Engin. Infor. Sc.* pp. 139–179 (2017)
12. Falin, J., Templeton, J.G.C.: *Retrial Queues*. Chapman and Hall/CRC (1997)
13. Kim, J., Kim, B.: A survey of retrial queueing systems. *Annals of Operations Research* pp. 3–36 (2016)

14. Liu, X., Chong, E., Shroff, N.: A framework for opportunistic scheduling in wireless networks. *Comp. Netw.* pp. 451–474 (2003)
15. Mitola, J., Maguire, G.: Cognitive radio: making software radios more personal. *IEEE Pers. Commun.* **6**(4) pp. 13–18 (1999)
16. Morozov, E., Dimitriou, I.: Stability analysis of a multiclass retrial system with coupled orbit queues. *Proceedings of 14th European Workshop, EPEW 2017, Berlin, Germany, September 7-8, 2017* (2017). <https://doi.org/10.1007/978-3-319-66583-2-6>
17. Morozov, E., Morozova, T.: Analysis of a generalized system with coupled orbits. *Proceedings of Fruct23, Bologna* (2018)
18. Sadek, A., Liu, K., Ephremides, A.: Cognitive multiple access via cooperation: Protocol design and performance analysis. *IEEE Trans. Infor. Th.* **53**(10) pp. 3677–3696 (2007)